

Mine Master Ltd.

Wilków, ul. Dworcowa 27
59-500 Złotoryja
tel.: 76 877 81 01, fax: 76 878 41 01

info@minemaster.eu
www.minemaster.eu




Face Master 2.3-1B

Single boom drilling rig

- Diesel powered articulated chassis with permanent 4-wheel drive
- Fail safe, wet multi-disc service brakes with additional fail-safe emergency-parking brake
- Latest concept heavy duty alloy profile feeder with stainless steel guide surfaces. Designed to improve performance and reduce operation costs.
- Ergonomic, fully adjustable, operator seat with suspension. Operator's driving cabin conforming to FOPS & ROPS regulations.
- B-40 L head rotation boom equipped with two-axial hydraulic actuator, with full automatic parallelism in both planes. The boom can also be used for cross-cutting
- Reliable hydraulic controls – ensuring low operating costs and high performance.
- Hydraulic joystick steering with full proportional control. Shock protection is provided.
- Minimum tramming height – 2.3m; with fixed canopy or closed cabin: 3.0 m

Face Master 2.3-1B

Single boom drilling rig

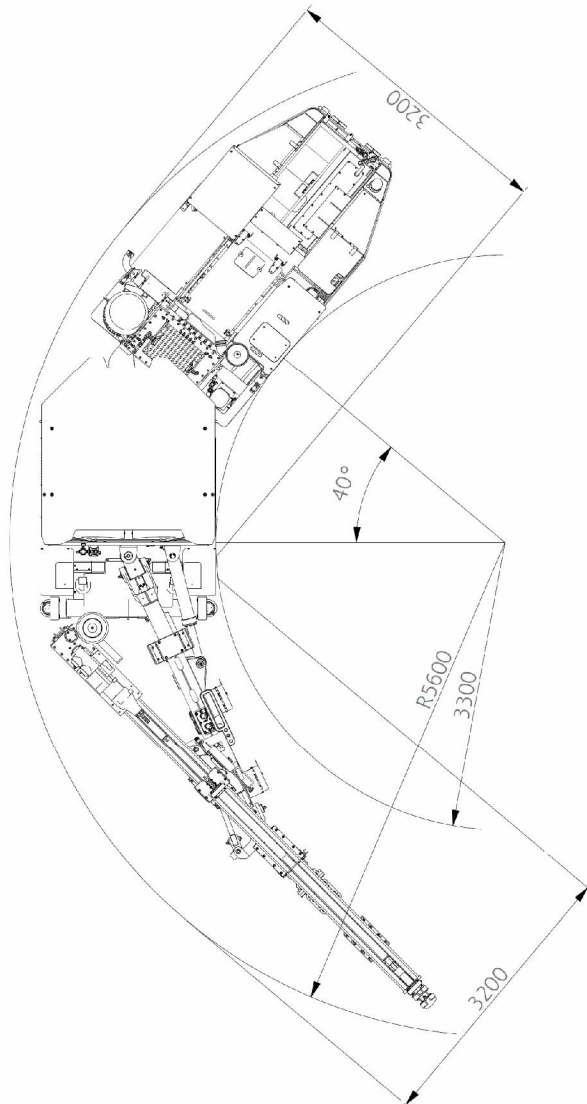


Main components

- Rotary-percussive rockdrill – Montabert
- Alloy feed
- Boom – B 40L
- Deutz diesel engine
- Tyres 12.00 x 20
- Operator's Protection canopy
- Typical installed electric power – 65kW
- Dana Off-Highway Powershift Transmission
- Dana Off-Highway Drive Axles
- Axial piston pump with load sensing controls
- Water booster pump
- Lubricator
- Air compressor
- Trimming and working lights

Options

- Closed, air-conditioned cabin
- Hydraulically extended canopy
- Feeder guidance system
- Feeder 8ft, 10ft, 12ft
- Telescopic feeders
- Electric cable
- Extra power outlet
- Fire suppression system
- By-pass filtration
- Air mist system with 400l tank
- Air mist system with connection to local water network
- Reverse camera
- Spare wheel

COVERAGE

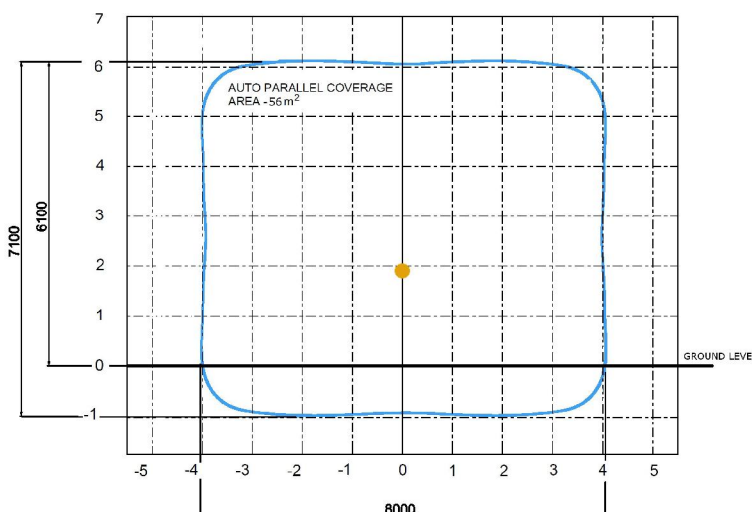

Weight and dimensions

Weight	20 600 kg
Length with 14ft feeder	12 750 mm
Width	1 990 mm
Min. height	2 300 mm
Min. seam width	3 200 mm
Grade ability	15°
Cross-grade	8°
Boom extension	1 500 mm
Boom lift	+40/-30°
Boom swing	+/- 40°
Feeder rotation	360°
Feeder crowd	1 500 mm
Feeder swing	+/-90°